

Convenient double drive with many functions



Customer benefits

- A small stable housing
- Laser-etched ratings plate
- Discreet appearance
- Wide-range voltage input (100 - 240V/AC) enables global use
- Eco-design directive (power consumption < 0.5 W in standby mode)
- Electronic overload switch-off
- Plug-in power supply cable
- Optimized logistics because of smaller housing
- Stylish housing
- Ratings plate is laser-etched
- Noise-optimized
- Built-in bidirectional 2.4 GHz radio control
- Built-in Bluetooth chip for iOS and Android
- LED operating status indicator for Bluetooth
- Can be combined with all Okin wireless hand-held transmitters (2.4 GHz bidirectional)
- Integrated floor lighting
- Optical feedback ensures user-friendly pairing process

- Key for reset function

Standard configurations


General data

Max. adjustment load per side	IPSe 5500N IPS 6500N
Max. torque	IPSe 432Nm IPS 468Nm
Max. adjustment speed at rated load	IPSe 3,8 mm/sec IPS 3,2 mm/sec
Stroke length of back section	69 / 74 / 87 mm
Stroke length of leg section	69 / 74 / 87 mm
Fitting dimension, length	708 mm
Fitting dimension, height	105 mm
Fitting dimension, centre distance	581 +- 1 mm
Fitting dimension, spindle diameter	IPSe 25 mm IPS 25 / 34 mm
Duty cycle	2 / 18 min
Duty cycle	10 %
Switching cycles, max./min.	5 /min
Protection degree	IP20
Protection class	II
Relative humidity	20 - 95 %
Ambient temperatures	0 to +40 °C
Mains power connection	100 - 240 V/AC
Safety	Electronic overload switch-off
Control unit	Built-in radio control
Motor	24 - 29 V DC motors, maintenance-free
Limit cut-off	Micro-switch
Housing colour	Black RAL 9005
Optional	External SMPS wide-range power supply
Certificates / Approvals	EN 60335-1 EN 62233 EN 55014-1 EN 55014-2


OKIMAT 4 IPSe




Vorderansicht

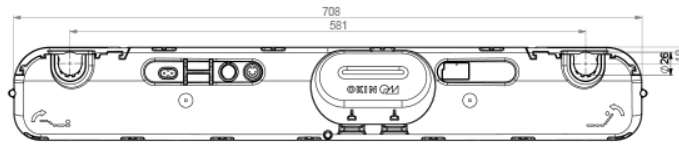

Seitenansicht



Draufsicht

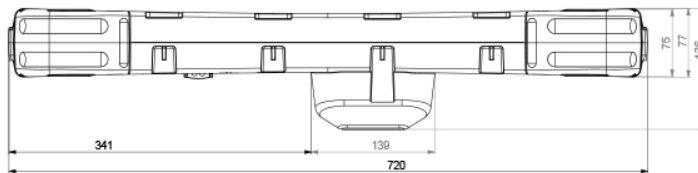

OKIMAT 4 RF BT



A Phoenix Mecano Brand



Page 5/5 - stand of 09/2020

OKIMAT 4 IPS




Vorderansicht
Front view

Seitenansicht
Side view

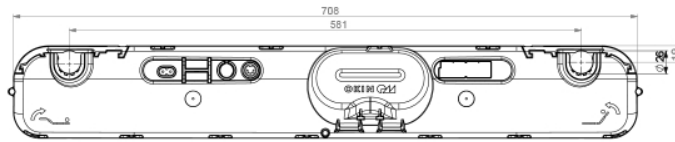

Draufsicht
Top view

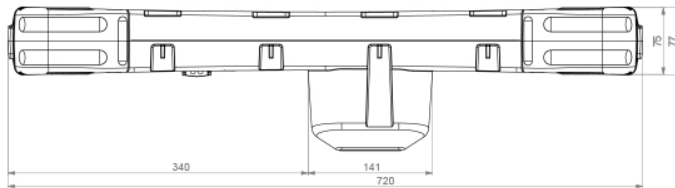

Note: Responsibility for OKIN products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which OKIN products are fitted. We accept no liability for the correctness.

DewertOkin GmbH • Weststraße 1 • 32278 Kirchlengern
Phone: +49 (0)52 23 / 9 79 -0 • Fax: +49 (0)52 23 / 7 51 82 • Email: info@okin.de • Internet: <http://www.okin.de>