

RECHARGEABLE BATTERY AG300

Page 1/3 - stand of 09/2020

Functionality guaranteed

The RECHARGEABLE BATTERY AG300 with proven lead-gel technology ensures the functionality of drives - a device, for example, can be operated during a power failure. The rechargeable battery can be fitted directly to the SGAG300 SMPS or alternatively to an AG300 mounting plate at another position. The output voltage is 24 V DC, the protection class is maximum IPX6.

Performance combined with design

The rechargeable battery has a compact design with a robust housing that is easy to clean.

Advantages at a glance

- Compact design
- Proven lead-gel technology
- Very robust and durable
- High IP protection class
- Easy to clean

- Output voltage: 24 V DC
- Rechargeable battery type: lead gel
- Protection type: max. IPX6



RECHARGEABLE BATTERY AG300



A Phoenix Mecano Brand

Page 2/3 - stand of 09/2020

Standard configurations

Performance data

Output voltage	24 V DC
----------------	---------

Components

Housing colour	light grey RAL 7035
----------------	---------------------

Rechargeable battery type	lead gel
---------------------------	----------

Further data

Protection type	max. IPX6
-----------------	-----------

Relative humidity	30% - 75%
-------------------	-----------

Ambient temperature	+10°C - +40°C
---------------------	---------------

Capacity	1.2 Ah
----------	--------

Assembly options	easily replaceable by means of snap-in device, mounting plate
------------------	---

Note: Responsibility for DEWERT products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which DEWERT products are fitted. We accept no liability for the correctness.

DewertOkin GmbH • Weststraße 1 • 32278 Kirchlengern

Phone: +49 (0)52 23 / 9 79 -0 • Fax: +49 (0)52 23 / 7 51 82 • Email: info@dewert.de • Internet: <http://www.dewert.de>


RECHARGEABLE BATTERY AG300



DEWERT

A Phoenix Mecano Brand

Page 3/3 - stand of 09/2020

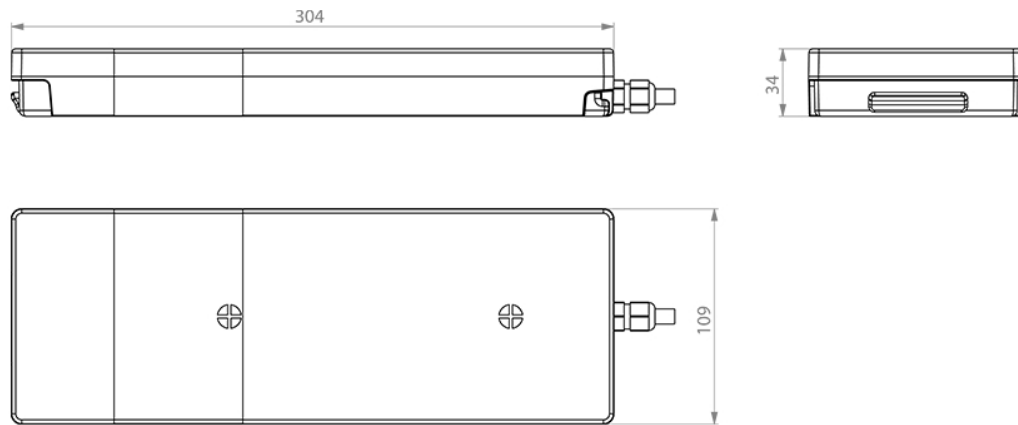

Note: Responsibility for DEWERT products when used for specific applications and for adherence to the appropriate guidelines, standards and laws is borne by the manufacturer of the complete system into which DEWERT products are fitted. We accept no liability for the correctness.

DewertOkin GmbH • Weststraße 1 • 32278 Kirchlengern

Phone: +49 (0)52 23 / 9 79 -0 • Fax: +49 (0)52 23 / 7 51 82 • Email: info@dewert.de • Internet: <http://www.dewert.de>